


NOTE:

ALL JOINTS ABOVE THE LEACHING AREA SHALL BE MORTAR SEALED INSIDE AND OUT.

24" DIA. C.I. GRATE & FRAME ALHAMBRA FOUNDRY A-1200 OR APPROVED EQUAL. ADAPT AS REQUIRED FOR V-GUTTER & CURB AND GUTTER INSTALLATION. SET RIM TO GRADE WITH PRECAST RISERS.

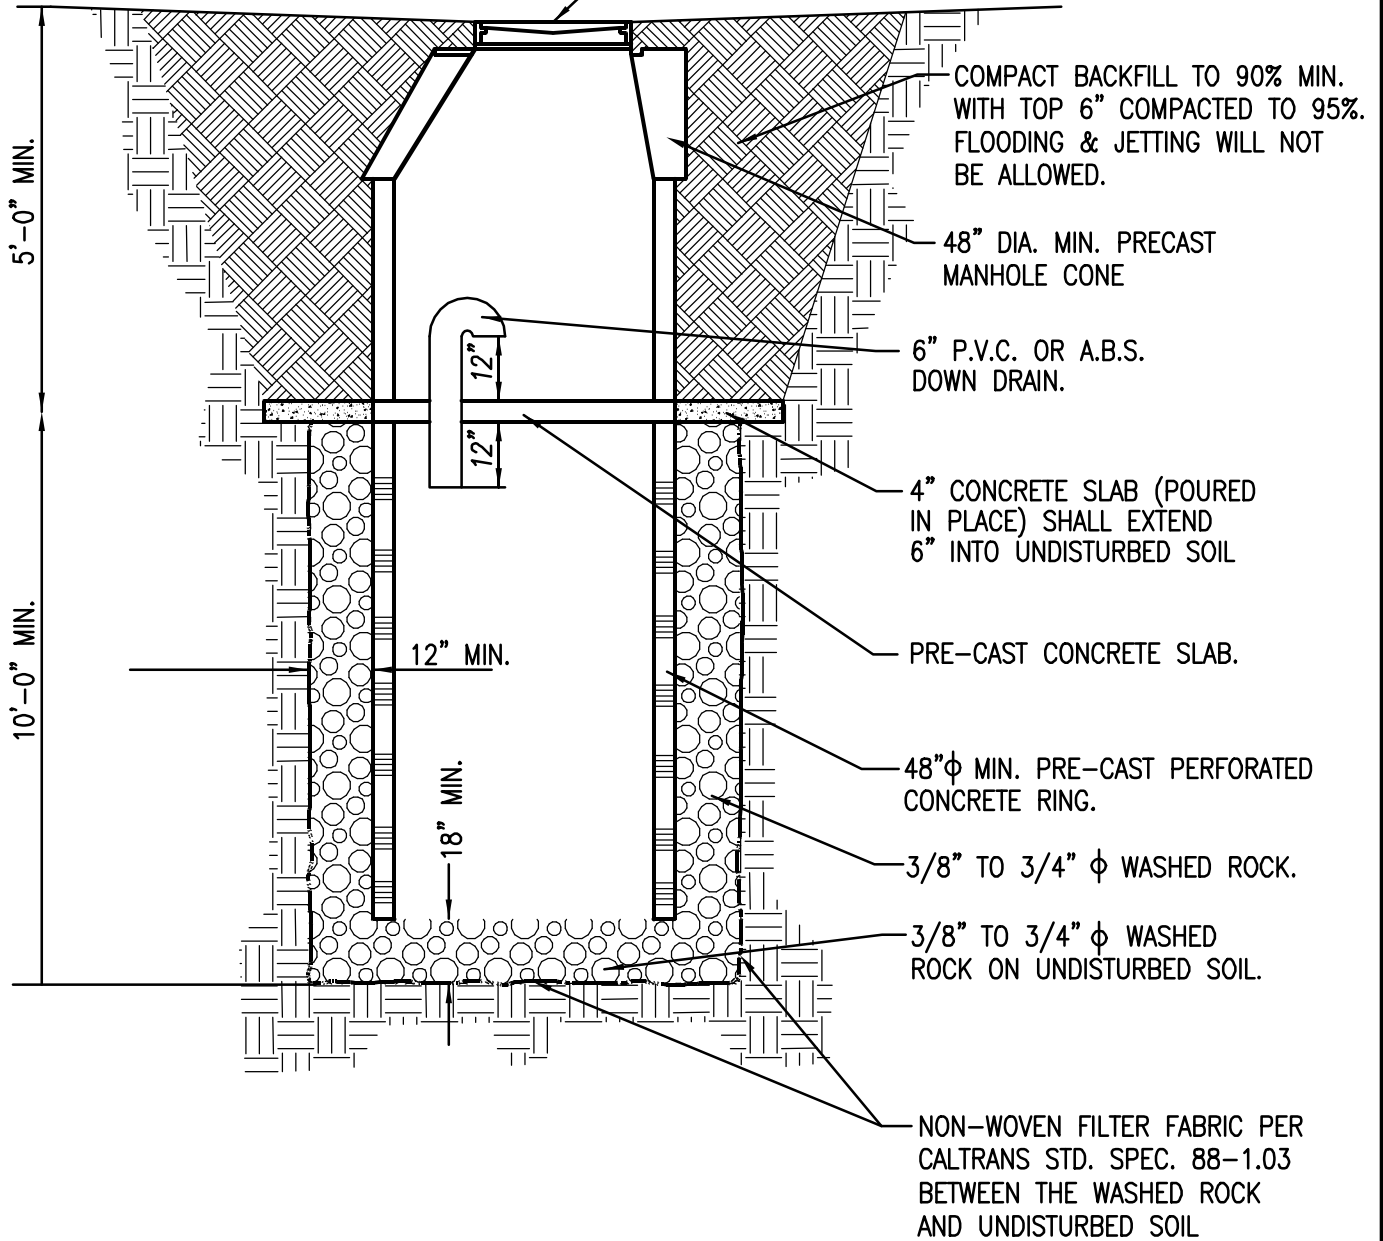

DATE: SEPT. 2001

STANDARD DRYWELL DETAIL

SCALE: NONE

Signature on File  
CITY ENGINEER

DEPARTMENT OF PUBLIC WORKS

CITY OF PALM DESERT

STD DRAWING NO.

111